



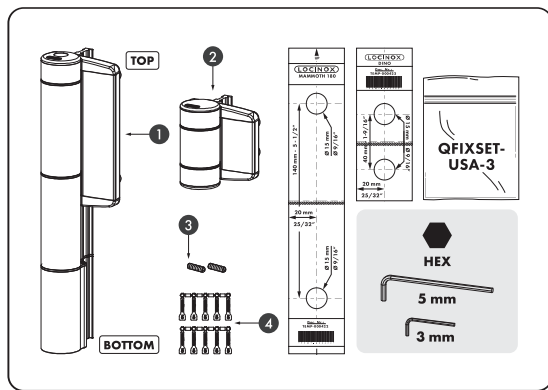

THE PRE-MOUNTED QUICK-FIX IS DESIGNED FOR WALL THICKNESSES OF 0.083" UP TO 0.190"

FOR THICKNESSES FROM 0.200" UP TO 0.313", REPLACE THE PRE-MOUNTED QUICK-FIX BY THOSE IN THE QFIXSET-USA-3 BAG. SEE STEP 6 TO DISASSEMBLE THE QUICK-FIX



LOCINOX USA



www.locinoxusa.com



877-LOCINOX







helpusa@locinox.com




www.locinoxusa.com/mammoth


①



②

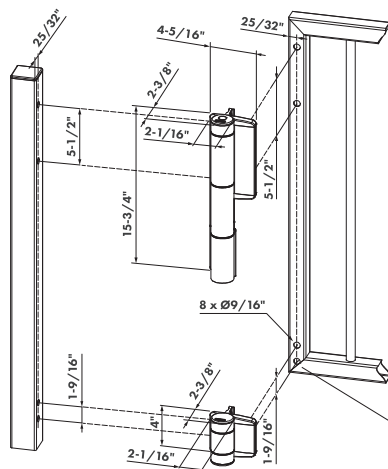



DO NOT EXCEED Ø9/16" !

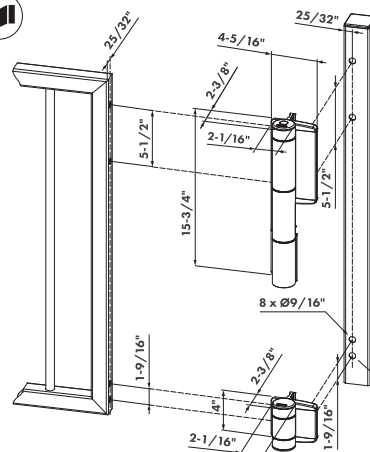



DO NOT EXCEED Ø9/16" !



③

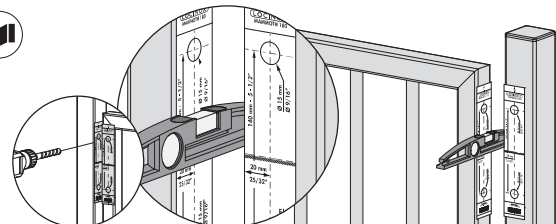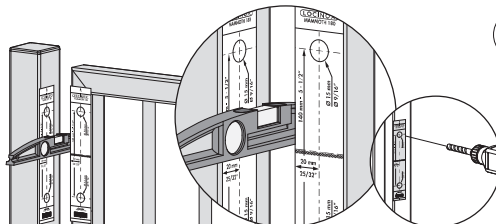


④

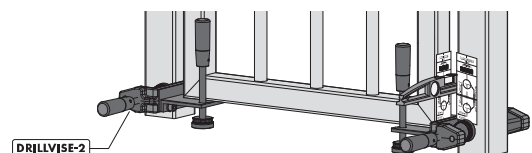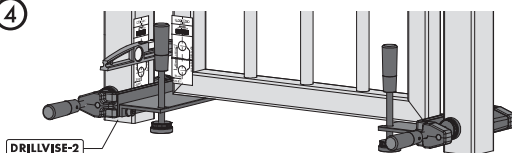


5

MAMMOTH



DINO




REMOVE THE
COVER CAPS
FIRST TO
REPLACE THE
QUICK-FIX IF
REQUIRED

6



ONLY FOR WALL
THICKNESSES FROM
0.200" UP TO 0.313".
REPLACE THE PRE-
MOUNTED QUICK-
FIX BY THOSE IN THE
QFIXSET-USA-3

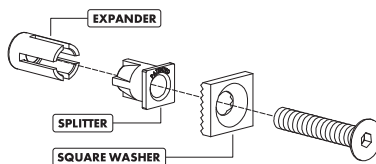

1





REMOVE EXISTING
QUICK-FIX WHERE
NEEDED. DISCARD
EXPANDER, SPLITTER,
BOLT (KEEP WASHER!)

2



REPLACE WITH
QFIXSET-USA-3
AND REUSE
THE SQUARE
WASHER





7



8



MAMMOTH





DINO





RE-INSTALL THE COVER
CAPS AND LOCK THE
QUICK-FIX COVER
WITH SET SCREW

9

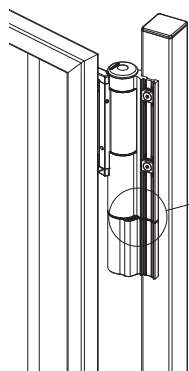

SPEED

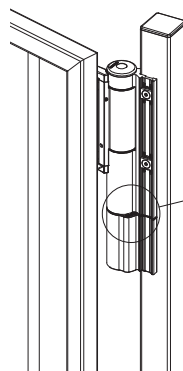

FINAL SNAP



pictures@locinox.com

SUCCESSFUL
INSTALLATION?
Please send us your
pictures & videos

INSTALACION
EXITOSA?
Por favor envíenos sus
fotos y videos

LOCINOX
Let's make it better together

Doc. Nr.: MANU-000422

Locinox NV • Brabantstraat 107 • 8790 Waregem • Belgium
Locinox CEE • Irysova 9 • 55-040 Bielany Wrocławskie • Poland
Locinox LLC • 460 Windy Point Drive • Glendale Heights • IL 60139 • USA

